Publication No. MII 13973-14449

/11 13973-1444

Issue Date Revised February 2013


Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

HONDA

INSTALLATION

INSTRUCTIONS

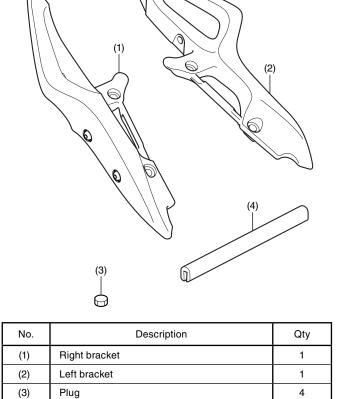

SUPPLIES REQUIRED

Molding

Scissors Ruler Isopropyl alcohol Shop towel

(4)

USE AND CARE INFORMATION

- Check the accessory mounts frequently.
- Added accessories can affect a motorcycle's stability, performance and safe riding speed.

INSTALLATION INFORMATION NOTE:


- Heat the bonding surfaces with a hair dryer if the ambient air temperature is below 70°F (21°C).
- The adhesive reaches full strength in 72 hours. Wait at least 24 hours before riding your motorcycle.

INSTALLATION <2013 NC700X/XD>

1. Refer to the Installation Instructions of the Saddlebag Support Brackets or Rear Carrier.

INSTALLATION <2012 NC700X/XD Only>

- 1. Refer to the Installation Instructions of the Saddlebag Support Brackets or Rear Carrier, remove the seat cowl.
- 2. Cut the molding according to the dimensions shown.

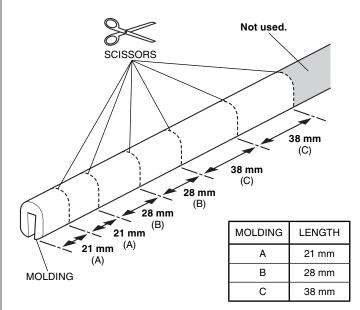



MOUNT BRACKETS

P/N 08L74-MGS-A30


P/N 08L74-MGS-J30

1

87971-MGS-A300

NC700X/XD

- 3. Attach the moldings to the cut part on the seat cowl as shown.
 - Repeat on the left side.

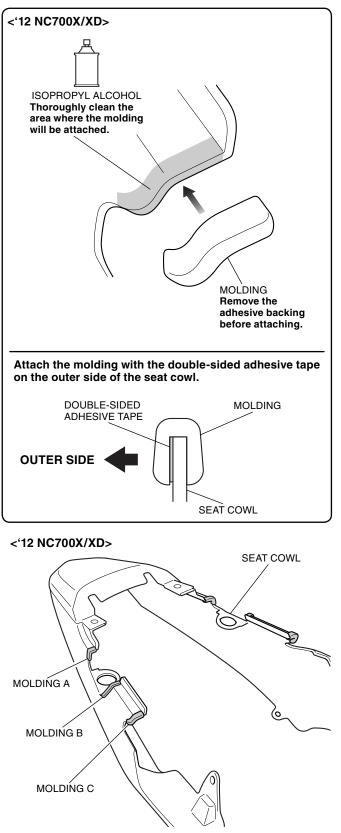

4. Install the seat cowl in the reverse order of removal.