

Ref: **BSLi-04** (12V 4Ah)

### SPECIFICATIONS

Model No.	BSLi-04	
Dimensions	Length	134mm
	Width	65mm
	Height	92mm
Weight	0.95kg	

### CHARACTERISTICS


Nominal Voltage	12V	
Capacity	4Ah	
Nominal Power	48Wh	
Internal Resistance	<10mΩ	
Working Voltage	10V~14.4V	
Operating Temperature Range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +55°C
	Storage	0°C ~ 30°C
Charge Current (A)	2A(0.5C) , Max. 8A(2C)	
Charge Retention	30 days > 97%	
Discharge	Continuous	160A (40C)
	Maximum	280A(70C) ≤15S
CCA ( -18°C storage for 20h )	120A(30C) ≤15S	
Cycle Life	2000 cycles	



### REPLACEMENTS

BTZ10S	BT12B-BS	BT14B-BS	BB14A-A1/A2
BT12B-4	BB12A-A/A-B	BB12C-A	12N12A-4A-1
BT14B-4	BB12B-B2	BB14-A2	
BTX14AH	BTX14AH-BS	BB14-B2	

### DISCHARGING GRAPH

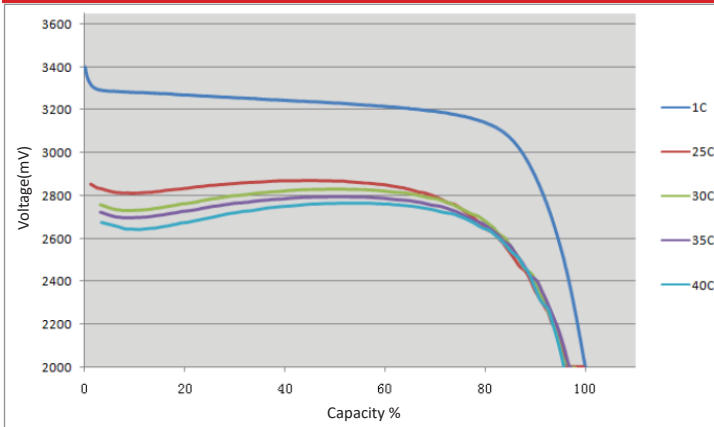

### CERTIFICATIONS

UN3480

### DRAWINGS

