

Ref: **BSLi-06** (12V 4Ah)

### SPECIFICATIONS

Model No.	BSLi-06	
Dimensions	Length	148mm
	Width	86mm
	Height	105mm
Weight	1.06kg	

### CHARACTERISTICS


Nominal Voltage	12V	
Capacity	4Ah	
Nominal Power	48Wh	
Internal Resistance	<10mΩ	
Working Voltage	10V~14.4V	
Operating Temperature Range	Charge	0°C ~ +45°C
	Discharge	-20°C ~ +55°C
	Storage	0°C ~ 30°C
Charge Current (A)	2A(0.5C) , Max. 8A(2C)	
Charge Retention	30 days > 97%	
Discharge	Continuous	160A (40C)
	Maximum	280A(70C) ≤15S
CCA ( -18°C storage for 20h)	120A(30C) ≤15S	
Cycle Life	2000 cycles	




### REPLACEMENTS

BTZ12S	BT12A	BT12S-BS	BT12A-BS
BTZ14S	BTX14	BTZ14S-BS	BTX14-BS
BTX12	BTX14H	BTX12-BS	BTX14H-BS

### DISCHARGING GRAPH

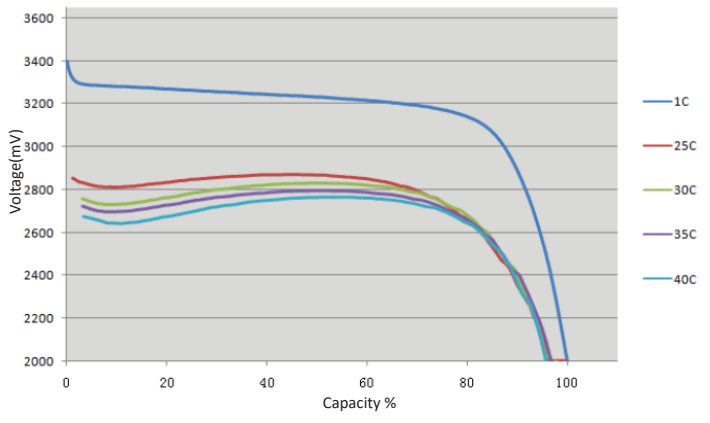

### DRAWINGS

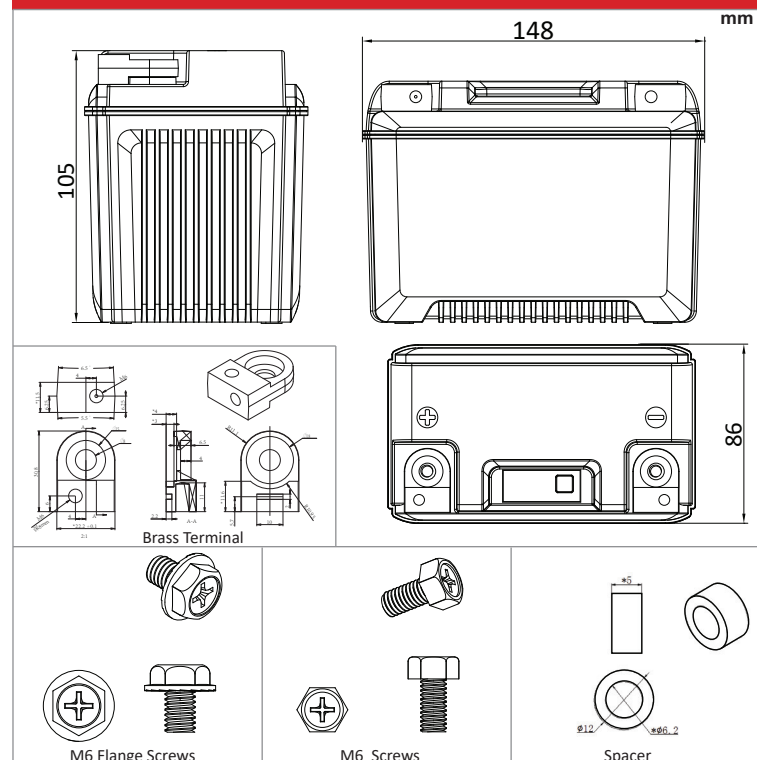

### CERTIFICATIONS

UN3480