

Ref: **BSLi-10** (12V 6Ah)

SPECIFICATIONS

| | | |
|------------|---------|-------|
| Model No. | BSLi-10 | |
| Dimensions | Length | 148mm |
| | Width | 86mm |
| | Height | 105mm |
| Weight | 1.28kg | |

CHARACTERISTICS


| | | |
|-------------------------------|-------------------------|----------------|
| Nominal Voltage | 12V | |
| Capacity | 6Ah | |
| Nominal Power | 72Wh | |
| Internal Resistance | <10mΩ | |
| Working Voltage | 10V~14.4V | |
| Operating Temperature Range | Charge | 0°C ~ +45°C |
| | Discharge | -20°C ~ +55°C |
| | Storage | 0°C ~ 30°C |
| Charge Current (A) | 3A(0.5C) , Max. 12A(2C) | |
| Charge Retention | 30 days > 97% | |
| Discharge | Continuous | 240A (40C) |
| | Maximum | 360A(60C) ≤15S |
| CCA (-18°C storage for 20h) | 180A(30C) ≤15S | |
| Cycle Life | 2000 cycles | |




REPLACEMENTS

| | | |
|---------|------------|-------------------|
| BTX20L | BTX20L-BS | B50-N18L-A |
| BTX20HL | BTX20HL-BS | B50-N18L-A2/A3/AT |
| BTX24HL | BTX24HL-BS | |

DRAWINGS

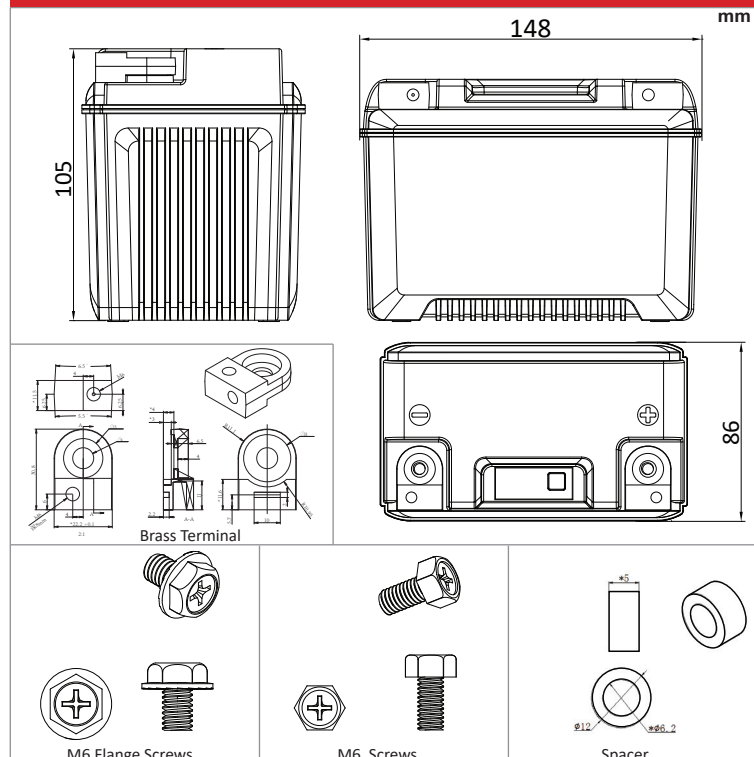

DISCHARGING GRAPH

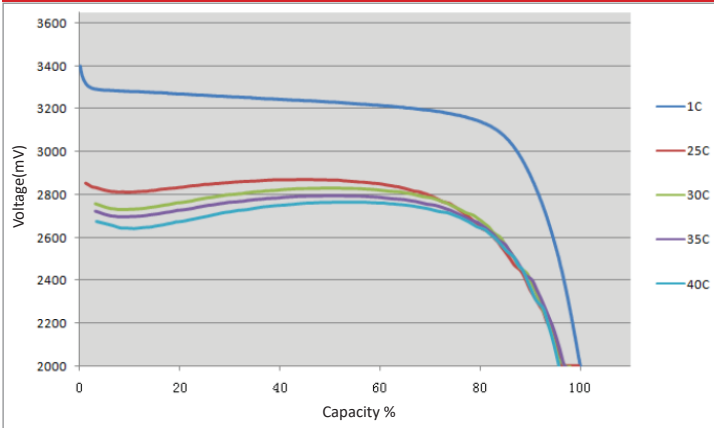

CERTIFICATIONS

UN3480